

## DS-KH6320-WTE1 Network Indoor Station



The KH6 series IP indoor station, with 7-inch touch screen and Android system, brings you a fluent video and audio communication. By considering the difficulty of deployment of the traditional video intercom, the device has improved the design and can deploy the whole video intercom system by itself independently, without extra devices or configurations, which reduces the deployment time and cost. You can view, chat with, and send permission for the visitor via mobile phone in anywhere. The device can also link other control systems, such as CCTV system, elevator control system, etc.

- 7-inch TFT touch screen with 1024 × 600 resolution
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door and live view remotely
- Easy to use without PC
- Easy wizard for quick set up
- Configure the whole system on one touch screen
- Live view of the door station and cameras in public areas
- Support voice messages when no response from the indoor station
- Receive alarms by linkage with a alarm system and notify the center to handle in time
- Elevator access control

## ▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	128 MB
Processor	Embeded high performance processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711U/G.711A
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Message capacity	TF card inserted: 200 captured pictures, 200 alarm records Without TF card: 2 MB RAM for picture storage; The storage number is decided by the picture size, 200 alarm records
Notice capacity	200
Linked indoor extensions capacity	16
Linked doorphone capacity	17
Linked network camera capacity	16
Network parameters	
Network protocol	TCP/IP, SIP, RTSP
Wi-Fi	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/



No. 555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
Tel: +86-571-8807-5998  
www.hikvision.com

Hikvision |
 HikvisionHQ |
 HikvisionHQ |
 Hikvision\_Global |
 Hikvision Corporate Channel |
 hikvisionhq

RS-485	1 RS-485 (Half duplex)
USB	/
TF card	Support TF card, up to 128 G
Alarm output	2
Lock control	2 relays, Max. 30 VDC 0.3 A
<b>General</b>	
Button	/
Installation	Surface mounting
Indicator	/
Weight	Net weight: 355 g (0.8 lb) Gross weight: 683 g (1.5 lb)
Protective level	/
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")
Battery	/
Application environment	Indoor
Power consumption	≤ 5 W
Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian

## ▪ Available Model

DS-KH6320-WTE1

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global




Hikvision  
Corporate Channel



hikvisionhq

▪ **Dimension**

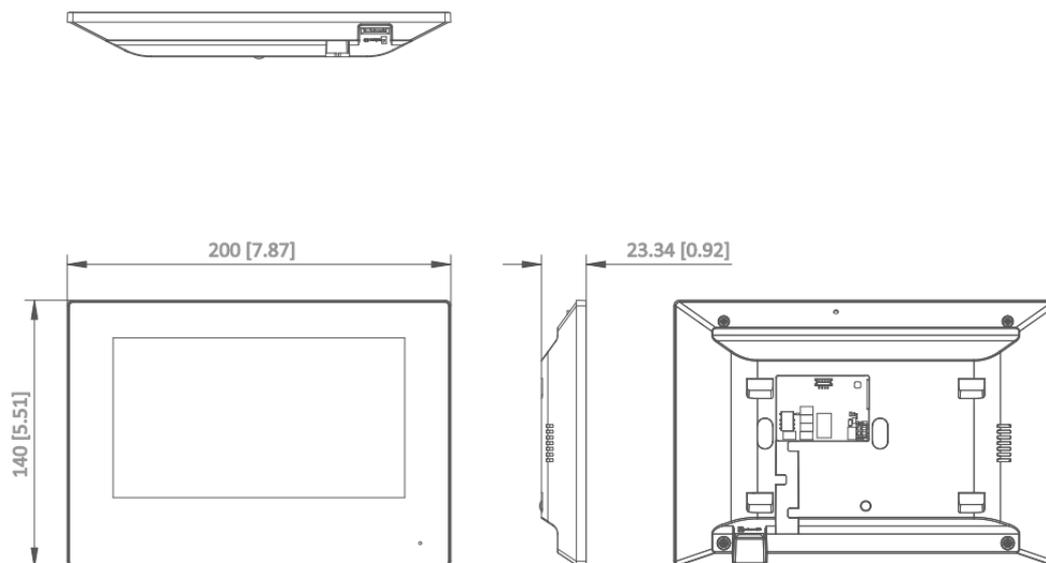

Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

<b>DS-KAW50-1</b> <b>50W 12V Power</b> <b>Adapter</b>	<b>DS-KABH6320-T</b> <b>Indoor Station</b> <b>Table Bracket</b>	<b>DS-KAW50-1N</b> <b>50W 12V Power</b> <b>Adapter</b>
		

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
 www.hikvision.com



Follow us on social media to get the latest product and solution information.

